

AUM51X

51cm concealed undermount rangehood





24



AUM51X 51cm concealed undermount rangehood

- AS430 fingerprint-proof stainless steel
- 645m³/hr airflow at maximum speed
- 45.5 dBA (minimum speed)
- 57 dBA (maximum speed)
- slider controls
- aluminium grease filter
- 2 x extraction levels
- 2 x 28W halogen lights
- duct outlet Ø120mm
- installation with outlet tube to the exterior/ recirculating
- easy installation system

10 AMP electrical connection, 3-pin plug and cord 100W maximum power consumption






EAN 9347777001245



AUM51X

51cm concealed undermount rangehood

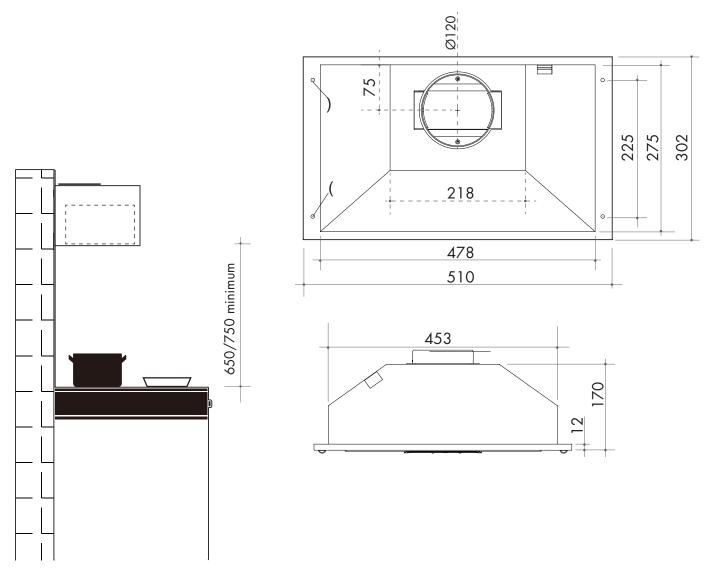

INSTALLATION:

650mm minimum height above electric cooktop 750mm minimum height above gas cooktop

03 9809 2155

NB: drawings are not to scale — they are to be used as a guide only. For detailed installation instructions, please refer to user guide.

07 3397 0850

08 9201 9188

Australia National Telephone Number 1300 694 583 New Zealand Telephone Number 0508 458 369 artusi.com.au ARTUSI showrooms are open Tuesday to Friday from 9am-5pm and Saturdays 10am-4pm **NSW & ACT** VIC | SA **TASMANIA** QLD WA | NT **New Zealand** (head office) 3 Pear Avenue CAMBERWELL

03 6272 7386

02 8569 4699